


# MP Compact4 Mark III

## Printer-Mounting Accessory Installation Instructions

These instructions describe how to install the printer-mounting accessory for the MP Compact4 Mobile Mark III printer.

The printer-mounting accessory is designed to keep the printer secure yet easily accessible on a forklift or other vehicle. This accessory kit includes the adapter plate, 57.2 mm (2.25") ball, and associated hardware to adapt the printer for use with the numerous mounting and attachment options available from RAM® mount. See [www.rammount.com/device/printer\\_mounts](http://www.rammount.com/device/printer_mounts) for the solution that best suits your needs.

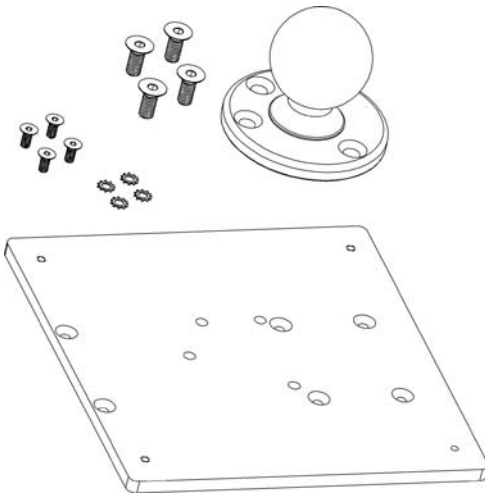

### **Shipping Box Contents**

- 1 x RAM mount ball 57.2 mm (2.25")
- 1 x Adapter plate
- 4 x Screws (M8X20)
- 4 x Screws (M5X12)
- 4 x Lock washers (M5)

### **Tools Required**

- Hex Driver, 2.5 mm
- Hex Driver, 3 mm
- Hex Driver, 5 mm
- Loctite 243

# Set Up the Printer



Caution

For your safety and to avoid equipment damage, always turn the printer power off and unplug the printer's power cord before beginning this installation and when performing service.




## Notes:


- Use of Loctite 243 on mounting screws is recommended due to vibration.
- Be sure to observe and follow all safety guidelines for installation on a forklift or any vehicle.
- Never try to adjust or operate the printer when a vehicle is in motion.
- See [www.rammount.com/device/printer\\_mounts](http://www.rammount.com/device/printer_mounts) for available options and additional safety/installation guidelines.

The factory mounting plate must be removed from the printer. If this plate is not installed on your printer, proceed to **“Install the Printer Mount” on page 3**.


- 1 Turn off and disconnect the power from the printer.
- 2 Using a 2.5 mm hex driver, remove the screw and retainer bracket.

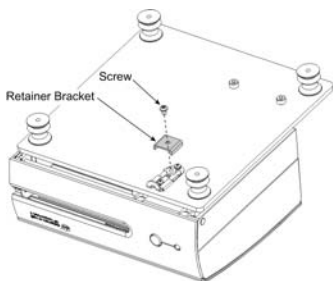

- 3 Slide the mounting plate lock outward and lift the mounting plate from the printer.

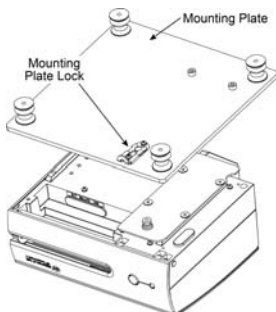


- 4 Using a 3 mm hex driver, remove the four screws and the mounting post bracket. Once removed, proceed to the **“Install the Printer Mount” on page 3.**

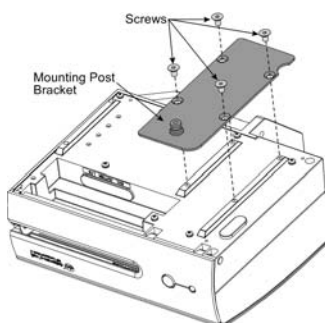


## Install the Printer Mount

- 1 Place the RAM mount ball onto the adapter plate as shown and secure with the four M8 screws provided in the kit.

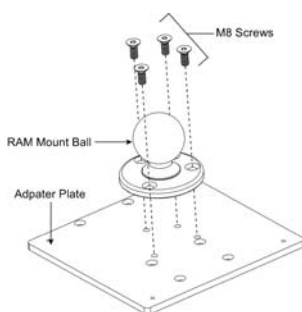

- 2 Position the adapter plate assembly on the printer as shown and secure with the four M5 screws and lock washers provided in the kit.

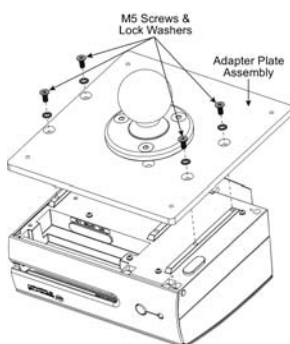

Warranty.

[www.honeywellaidc.com/warranty\\_information](http://www.honeywellaidc.com/warranty_information)

## Honeywell

[www.honeywellaidc.com](http://www.honeywellaidc.com)

Copyright © 2016

Honeywell International Inc.

All rights reserved.



MP Compact4 Mark III Printer-Mounting Accessory Guide



P/N: 92-2743-01